


DATASHEET

P 261-AMT ARRAY BRACKET 20°

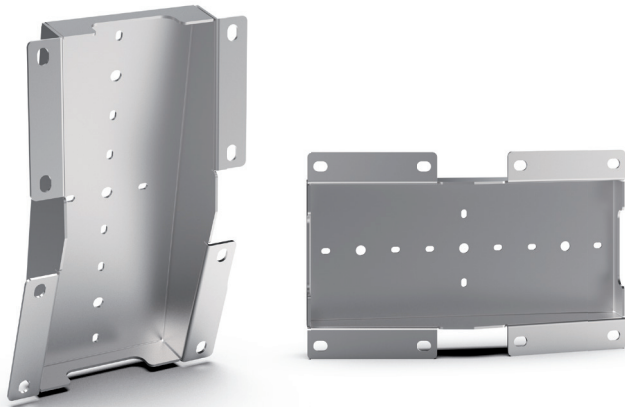

The **P 261-AMT Array Bracket 20°** makes it possible to cluster a maximum of two H-versions of the P 261-AMT series.

The array bracket is made of stainless steel and has various mounting holes for wall or ceiling brackets.

The bracket is attached to the loudspeakers via screw connections with the sliding blocks, which are inserted into the rear grooves of the loudspeakers.

A drop protection by means of ring eyelets can be attached by the user directly to the loudspeakers or to the array bracket.



EQUIPMENT / OPTIONS



See second page for explanation of the symbols.

APPLICATIONS

Churches, museums, live PA, train stations, airports, sports facilities, legislative buildings, conference rooms, lecture halls, shopping centres, A/V presentation rooms

P 261-AMT ARRAY BRACKET 20°

MECHANICAL PROPERTIES

Material:	Stainless steel
Standard colours:	Stainless steel, grinded RAL colours according to customer requirements
Supported loudspeakers:	P 261-AMT Event (H) P 261-AMT Cine (H)
Supported hole pattern for mounting brackets:	72 - 75 mm
Weight:	2.7 kg

*It is not recommended to cluster the V-versions of the P 261-AMT due to the horizontal radiation pattern.

EQUIPMENT / OPTIONS AT GLANCE – ACCESSORIES



Customised painting/colouring
within the RAL colour range. Other colour systems such as RAL design, Pantone, etc. are available on request.



Looks good, sounds good.
Pan Acoustics' products are defined by natural sound and attractive design.







Some equipment features cannot be combined. For information about which features can be combined with each other, please send an e-mail to sales@pan-acoustics.de.

Our quality promise

Pan Acoustics stands by its products and gives up to **10 years warranty** on its loudspeakers for any material or manufacturing defects. New products manufactured in accordance with protection classes IP54 and IP65 as well as digital audio interfaces (DANTE®) from Audinate Pty Ltd and rechargeable batteries are excluded from the 10-year warranty. A warranty period of 3 years is granted for loudspeakers in accordance with protection classes IP54 and IP65.



TECHNICAL DRAWING

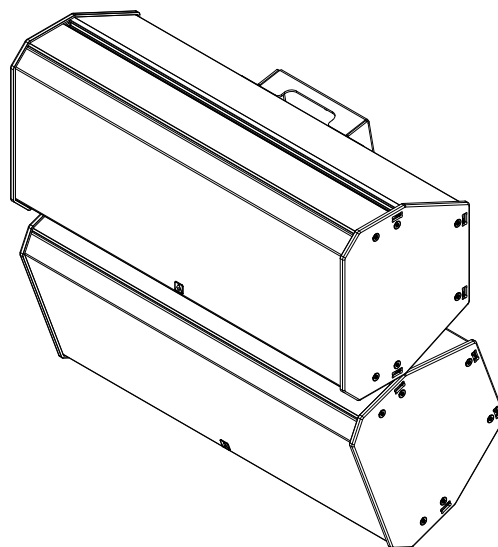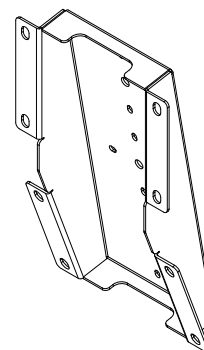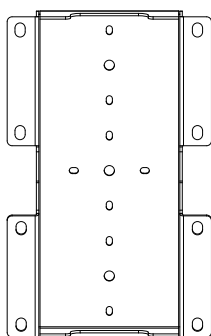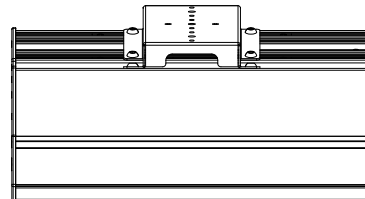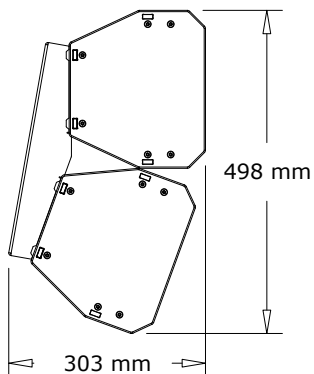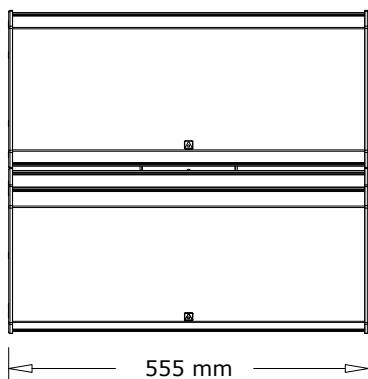

TECHNICAL DRAWING

